

EDXtreme Dynamometer

Lifting the bar in electronic dynamometers



Dillon EDXtreme

For the toughest jobs you face

Guesswork is not acceptable - failure is not an option. When you have people working around high tension cables and massive loads, there is no room for error. You have to have complete confidence in the strength and the accuracy of your measurement tools.

Since 1937, Dillon dynamometers have been chosen for the jobs where only the best will do. Now, Dillon has once again lifted the performance bar and set the standards for others to follow - Dillon EDXtreme.



Uncompromising on Safety – adaptable to the need

The EDXtreme exemplifies the trademark precision and rugged construction of Dillon dynamometers. It's highly refined design draws on the inherent strengths of premium-grade materials to achieve a 5:1 minimum factor of safety.

While the EDXtreme may be configured for something as simple as a digital hanging scale, it offers a higher level of intelligence. With user-defined functions and sophisticated communication options, the EDXtreme readily adapts to multi-tasking operations or multi-link systems capable of monitoring a series of stress points from a single location – *it is the definition of application versatility.*

Popular industry – standard shackles insure proper fit

Battery compartment – easy access without tools

Sturdy aircraft – quality aluminium (shown) or painted alloy steel case on high capacity models


High-resolution dot-matrix LCD display offers large numbers without confusing abbreviations or multipliers

Injection moulded, thick Lexan panels offer superior impact protection

Softkey interface allows easy and intuitive operation and configuration

NEMA 4X/IP55 designed for weather and water resistance

Rounded ends reduce weight and prevent binding and snagging with rigging

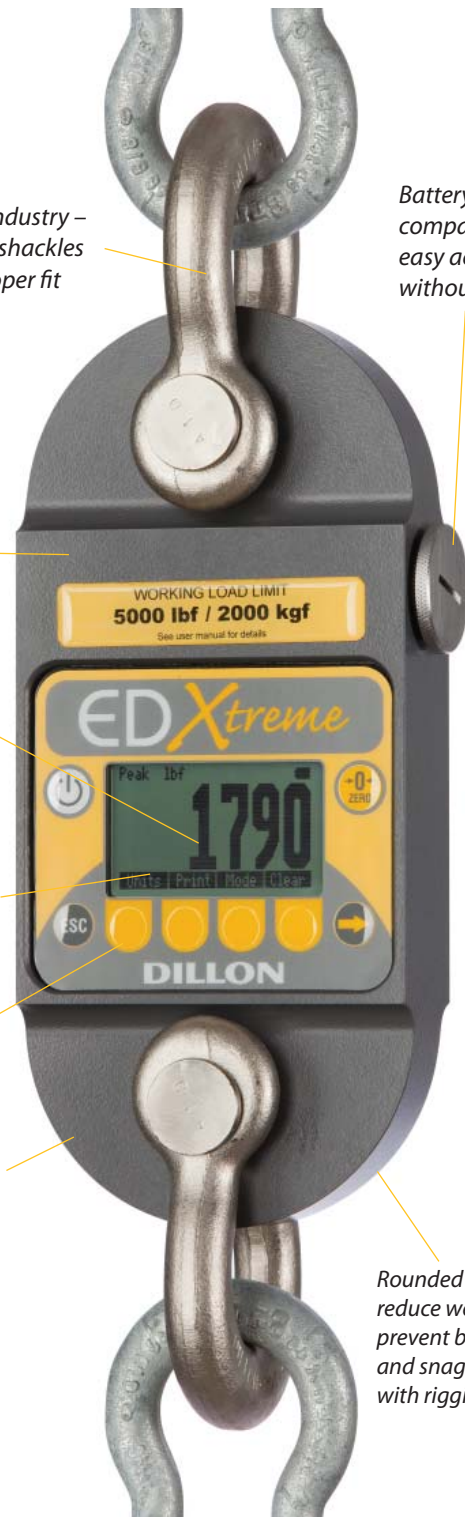

**Models available in capacities
from 1000 to 250,000 kgf
(2500 to 550,000 lbf).**

Signature features of the EDXtreme

Xtreme Engineering

Building a precision instrument that can survive real-world punishment requires masterful engineering. This is where Dillon's experience shines through. The engineers assigned to the EDXtreme drew on a depth of industrial application knowledge and conducted exhaustive materials testing to achieve the highest structural integrity.

- **Superior strength and corrosion resistance** – High capacity models are constructed of powder coated aircraft quality alloy steel. Lower capacity models are power coated aircraft quality aluminium.
- **5:1 factor of safety** – This measure of strength and safety is maintained at all capacities (*capacities of 75T and above are 4:1 USF*). Computer modelling confirms the low stress and long product life that is inherent in the EDXtreme design.
- **Retained Hardware** – allows permanent attachment of cantering spacers which eliminates fumbling during high capacity rigging.
- **NEMA 4X/IP55** – The EDXtreme is clearly the choice for readability in any environment – in plant or out on the job site.
- **Warranty** – 2 years parts and labor

Xtreme Accuracy

High resolution and accurate repeatable readings are essential to proper weighing. The higher standards set for the EDXtreme meant taking the time to ensure that material characteristics, load element design and strain gage meshed perfectly. The result of that effort is a typical accuracy of 0.1% of capacity up to EDX-50T and 0.3% of capacity for EDX-75T and above. The enhanced resolution mode of 1 part in 5000 provides the level of readability needed for refined weighing.

Xtreme Ease

- **Exclusive SOFTKEY interface** – Dillon has eliminated confusing menus for faster set-up and simple operation. In addition to lbf, kfg and Newtons, programmable functions can correct for gravitational variations and allow the use of custom units of measurements.
- **Wide angle, backlit LCD** – Provides improved readability over a wider viewing angle and has backlighting for low light conditions.
- **Battery operation** – The EDXtreme is powered by two standard C-cell batteries. Batteries are easily accessible for fast replacement.

Configuration Options

A basic stand alone model can be easily upgraded "in-the-field" to accommodate changing needs. Remote configuration, data acquisition and single point monitoring of multiple links are all possible with the hardwired or radio communication option with the EDXtreme.

Optional Remote Communicator



Typical Configuration

1. Stand alone EDXtreme for simple, direct measurement applications.
2. Single network with one EDXtreme radio dynamometer and optional Communicator.
3. Single network with multiple EDXtreme radio dynamometers and one optional Communicator. The Communicator offers the ability to monitor the load at each link as well as a viewing the total weight of multiple dynamometers.
4. Multiple network with multiple EDXtreme radio dynamometers and Communicators.

An RS-232 interface is standard on both the EDXtreme and Communicator for connection to a host PC.



KEY: plant airspace discrete radio channel

Communications Unlock the Full Potential of the EDXtreme

One of the foremost reasons for choosing an electronic dynamometer is added functionality. The radio or hardwired options available with the EDXtreme offer the convenience and safety of remote operation. Additionally, data from the dynamometer(s) can be downloaded to a PC via an RS-232 connection for compilation and analysis or to generate hard copy print-outs.

Remote control and radio communications are not new to the Dillon product line. In fact, it is the depth of Dillon's experience in this area that led to meaningful innovations in the design of the EDXtreme and its optional remote Communicator.

Improved Radio Performance

Unlike the single frequency products on the market today, the EDXtreme radio dynamometer utilises leading edge 2.4 GHz radio frequency technology to eliminate common interference. This technology will automatically "hop" from frequency to frequency to establish and maintain the strongest, most reliable communications.

Dynamic Monitoring and Control

The optional Communicator is an extremely powerful hand-held remote that can define the function and manage the operation of one or more EDXtreme dynamometers using wired or radio technologies. Through the programmable SOFTKEY interface, one Communicator can monitor multiple dynamometers within the same airspace. In multiple link lifting arrays, the Communicator can display readings at any or all lift points and calculate the total load.





Small details improve durability. The EDXtreme features a recessed connector and embedded antenna to help prevent damage from snags that commonly disable other instruments.




Standard Accessories

Cases for secure transportation and storage of instruments and shackles.

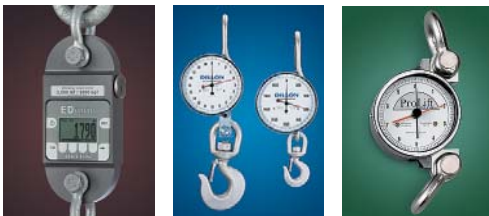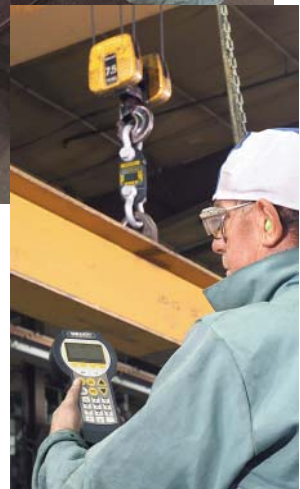

Dillon on the job

Dillon force measurement equipment is the preferred choice of public utilities, nuclear facilities, tower erectors, armed services and material handlers throughout the world. In addition to the EDXtreme, Dillon's electronic line includes the EDjunior, an exceptional value for basic applications. Dillon also manufactures crane scales, high accuracy mechanical dynamometers and overload protection devices.



DILLON

Force Measurement Equipment
A division of Avery Weigh-Tronix, LLC

Foundry Lane, Smethwick,
West Midlands B66 2LP

Tel: +44 (0) 845 246 6717 Fax: +44 (0) 845 246 6718

E-mail: sales@dillon-force.co.uk

www.dillon-force.co.uk

© Avery Weigh-Tronix 2010. All rights reserved. This publication is issued to provide outline information only which, unless agreed by Avery Weigh-Tronix in writing, may not be regarded as a representation relating to the products or services concerned. Avery Weigh-Tronix reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.

10/11 EDX_RoW_L_500591.indd
AWT35-500591A (web 6/12)